


Sample Testing Sump

Typically installed after a pre-treatment tank. This tank holds only a small amount of water and is installed to allow easy access so that a sample can be taken of the waste water flowing through before discharge to sewer.

Capacity litres	Dimensions mm			
	A	B	C	D
9	300	300	100	700
(maximum)				

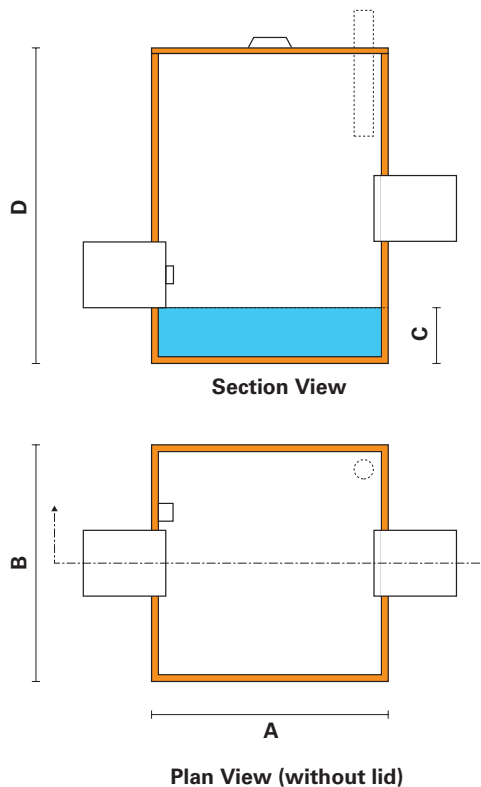

Testing Sump model HP-12

- Manufactured from Polyethylene or Polypropylene – Paneltim®, this tank is suitable for above or below-ground installations
- Above-ground units supplied with a loose fitting lid
- Size of outlet pipe and inlet pipe configuration to be nominated at time of order
- Cement mortar Test Block to be supplied and fitted by Trade Waste inspector
- When installed below-ground Cast Iron or Concrete Slab covers should be fitted on top

Also available from Hugo Plastics

- Grease Interceptors for above and below-ground installations
- Mixing Tanks
- Settling Tanks
- Pump Tank
- Silt Pit
- Testing Sump
- Solvent and Oil Interceptor
- Petrol and Oil Interceptor
- Cooling and Straining Tank
- Custom Fabrication to order